

DETAILED PROJECT REPORT

150 kW DC Fast-Charging Station

1 × 120 kW + 1 × 30 kW dual-gun DC chargers with 200 kVA HT substation

Hubli–Gadag Road (NH-67), Binkadakatti, Gadag taluk, Gadag district, Karnataka

150 kW

Installed DC charging
capacity

4 guns

2 chargers, dual-gun each

₹63.06 L

Total project cost

₹37.80 L

Term loan requested

Submitted to	[Bank name, branch]
Promoter / Applicant	Mr. Manjunath
Prepared by	Sonar.EV
Report date	8 October 2026
Version	1.0

Contents

1. Executive Summary	2
2. Promoter Profile	3
3. Project Description & Business Model	4
4. Site & Land Particulars	5
5. Location Survey: Traffic & Demand	6
6. Market Assessment	8
7. Technical Configuration	9
8. Civil, Electrical & Equipment Scope	10
9. Utilities, Manpower & Operations	11
10. Project Cost	12
11. Means of Finance	13
12. Operating Assumptions	14
13. Revenue & Operating Cost Projections (Y1–Y8)	15
14. Projected Profitability Statement	16
15. Projected Cash Flow Statement	17
16. Projected Balance Sheet	18
17. Depreciation Schedule	19
18. Loan Repayment Schedule & DSCR	20
19. Key Financial Indicators	21
20. Sensitivity Analysis	22
21. Implementation Schedule	23
22. Statutory Approvals & Documentation Checklist	24
23. Risk Analysis & Mitigation	25
24. Environmental, Social & Safety Considerations	26
25. Conclusion	27
Declaration by Promoter and Abbreviations	27
References	28
Annexure A: Site Plan	29
Annexure B: Monthly Loan Amortisation	30
Annexure C: Vendor Quotation (The Lynx)	32
Annexure D: Exicom and Canopy Quotations	38

1. Executive Summary

Mr. Manjunath proposes to set up a public DC fast-charging station on the Hubli–Gadag Road (NH-67) at Binkadakatti, about 6 km from Gadag town. The station will have one 120 kW and one 30 kW dual-gun DC charger from Exicom, so four vehicles can charge at once. It will sit under a canopy and draw power from a new 11 kV, 200 kVA substation. The corridor links Dharwad, Hubballi, Gadag, Koppal, Hosapete and Ballari^[8], and the directory lists only two charging points in Gadag^[7].

The total project cost is **₹63.06 lakh**, financed by a term loan of **₹37.80 lakh (60%)** and promoter contribution of ₹25.26 lakh (40%). The loan has a 36-month moratorium on principal and is repaid over 60 monthly instalments.

1.1 Project at a Glance

Project	150 kW DC fast-charging station (1 × 120 kW + 1 × 30 kW, dual-gun, Exicom)
Promoter	Mr. Manjunath
Location	Hubli–Gadag Road (NH-67), Binkadakatti, Gadag taluk, Gadag district, Karnataka · 15.42335° N, 75.57571° E
Land	[Owned / leased; survey no.; extent] · road frontage 60 ft
Configuration	4 charging guns, 4 bays under canopy; 4,700 × 1,000 mm charger foundation
Power	11 kV HT connection; 200 kVA, 11/0.433 kV transformer; 400 A LT kiosk
Facilities	Canopy, interlocking-paver parking, fencing, fire safety, CCTV/connectivity modem, reserved parking signage
Total project cost	₹63.06 lakh (₹63,06,278)
Means of finance	Term loan ₹37.80 lakh; promoter ₹25.26 lakh
Implementation period	About 16 weeks from work order, advance and approvals
Employment	3 direct jobs (manager and two attendants)

1.2 Key Financial Indicators

₹7.67 L Year-1 revenue	₹(2.22) L Year-1 EBITDA	2.28× Average DSCR (repayment period)	1.30× Minimum DSCR (repayment period)
16.5% Project IRR (10 yrs)	20.6% Equity IRR (10 yrs)	₹19.75 L NPV at 12%	6.1 yrs Payback period

Appraisal position. Cash accruals cover debt service in the repayment period with a minimum DSCR of 1.30× and an average of 2.28×. The 36-month principal moratorium and a ₹9.00 lakh working-capital margin carry the station through its ramp-up. The main variable is traffic and electric-vehicle uptake on the corridor; a 7-day site traffic count will confirm the volume assumed in this report.

2. Promoter Profile

2.1 Applicant Details

Name	Mr. Manjunath
Brand	Sonar.EV
Constitution	[Individual / proprietorship / partnership / company]
Date of registration	[dd-mm-yyyy]
PAN / GSTIN	[PAN] / [GSTIN]
CIN / LLPIN	[if applicable]
Udyam registration	[Udyam no.]
Address	[Registered / residential address]
Contact	[Mobile, e-mail]
Existing banker	[Bank and branch]

2.2 Promoter Background & Capability

Experience	[Years and nature of experience]
Existing businesses	[Details, if any]
Source of promoter contribution	[Own funds ₹25.26 lakh; source and proof]
Professional support	EPC contractor: The Lynx (electrical and civil, quotation 06-10-2026). Charger supply: Exicom. Project report: Sonar.EV.

3. Project Description & Business Model

The project is a roadside public charging station for electric cars, light commercial vehicles and buses on NH-67. Drivers pull in from the highway, plug into any of four guns and pay per kWh through an app, card or UPI. The station is built around these elements:

- **Charging:** one 120 kW dual-gun charger for fast top-ups and one 30 kW dual-gun charger for slower charging, both DC units from Exicom.
- **Power:** a dedicated 200 kVA, 11 kV substation with metering, VCB, transformer and LT kiosk.
- **Site:** canopy, paved bays, fencing, fire-safety kit, signage, bollards and car stoppers.
- **Connectivity:** data modem and charge-point management for remote monitoring and billing.

3.1 Operating Model

Operating hours	24 × 7, with a manager and two attendants working day and night shifts
Systems	Charge-point management system with remote monitoring; DAS connectivity modem included in the quotation
Payments	Per-kWh pricing; app, card and UPI payments, settled through a payment gateway
B2B tie-ups	Taxi and cab operators, intercity electric buses and delivery fleets on the corridor

3.2 Revenue Streams

Stream	Basis	Year-1 revenue (₹ lakh)	Share
DC fast-charging sales	kWh sold × ₹20 per kWh (before GST)	7.67	100%
Total		7.67	100%

4. Site & Land Particulars

Item	Details	Status / requirement
Road / corridor	Hubli–Gadag Road, NH-67 (trunk road)	Public road; four-lane
Village / taluk / district	Binkadakatti / Gadag / Gadag, Karnataka	—
GPS	15.42335° N, 75.57571° E	From shared map location
Access	Direct frontage on NH-67; entry and exit from the road side	Road-entry permission [NHAI / PWD]
Distance (straight line, approx.)	Gadag 5.8 km · Hubballi 48.9 km · Dharwad 61 km · Koppal 63 km · Hosapete 89 km	—
Plot dimensions	Frontage 60 ft; depth [ft]	Tape survey required
Area	[sq ft / guntas]	As per RTC / survey sketch
Ownership / lease	[Owned by promoter / lease terms: tenure, rent, escalation]	Title documents required
Neighbours	Agricultural land on both sides; small building and residential layout plots to the east	From satellite imagery
Nearest substation / HT line	[Name and distance]	Sanction from distribution company
Land use	[Present use and conversion status]	Permitted use for commercial / charging activity

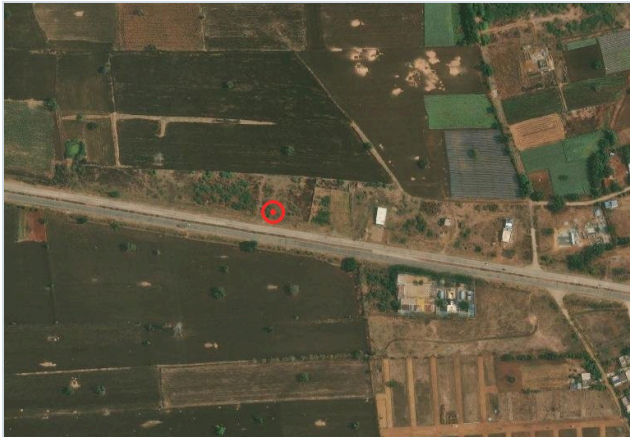


Figure 4.1 Corridor view (~880 m across). The road runs east–west just south of the plot.



Figure 4.2 Site markup: 60 ft frontage on Google Maps (scale 50 ft / 20 m).

Satellite imagery: Esri World Imagery (© Esri, Maxar, Earthstar Geographics and the GIS user community), retrieved 8 October 2026.

Land bankability. The plot is a commercially usable roadside parcel with direct highway access. **[Confirm: lease tenure, if any, exceeds the 8-year loan period; land use permits commercial charging activity]**.

5. Location Survey: Traffic & Demand

5.1 Corridor / Location Profile

- NH-67 is the trunk road linking Dharwad, Hubballi, Gadag, Koppal, Hosapete and Ballari^[8].
- NHAH has awarded a 144 km Hubballi–Hosapete section that passes through Gadag^[9].
- The site is 5.8 km from Gadag (district headquarters, about 1.73 lakh people^[6]) and 49 km from Hubballi.

5.2 Estimated Daily Traffic at Site

Method: a four-lane trunk road between two district towns is taken at 12,000 vehicles a day in both directions in Year 1, growing 5% a year. The class mix is a standard national-highway mix. A 7-day classified count at the site will confirm these figures.

Vehicle class	Share	Vehicles / day (both directions)
Cars (4W)	35%	4,200
Light commercial / vans	12%	1,440
Buses	5%	600
Trucks	22%	2,640
Two-wheelers	20%	2,400
Three-wheelers and others	6%	720
Total	100%	12,000
Target customers: electric cars	1.0% of cars in Year 1	42

5.3 Market Data (State)

Indicator	Value	Source
EVs registered in India, calendar 2025	About 23 lakh (8% of new registrations)	[1]
Electric four-wheelers registered in India, 2025	About 1.75 lakh	[1]
Karnataka electric-car sales, FY 2025-26	24,201 units, about 11% of India's e-car sales	[2]
Karnataka e-4W registrations, FY 2024-25	12,200 (FY 2023-24: 10,300)	[3]
Karnataka overall EV share, FY 2025-26	9.38% against 7.49% national average	[3]
Public charging stations planned under PM E-DRIVE	About 72,300, including 22,100 fast chargers for e-4W, along 50 national-highway corridors	[4]
Charging points listed in Gadag	2 (Ather and IOCL)	[7]

5.4 Demand in Nearby Districts

District	Location	Population (Census 2011)	Distance from site (approx.)
Gadag	Home district	10.65 lakh	—
Dharwad	Beyond Hubballi, to the west	About 18.5 lakh	61 km
Haveri	South of Hubballi–Dharwad	About 15.98 lakh	—
Koppal	East on NH-67	About 13.90 lakh	63 km

Populations are Census 2011 figures from citypopulation.de^{[5][11]}. Electric cars from these districts and from through traffic on NH-67 form the catchment.

5.5 Demand Check

The base case needs 4.2 charging sessions a day in Year 1 (105 kWh) and 25 a day in Year 5. That means 10% of passing electric cars stopping to charge in Year 1, rising to 16% in Year 5. Break-even on a cash basis is 256 kWh a day (7.1% use of 150 kW).

6. Market Assessment

6.1 Location Advantages

- Direct frontage on a four-lane national highway with visibility from both directions.
- About 6 km from Gadag town; the public directory lists no DC fast charger in Gadag^[7].
- Open land allows a canopy, four bays and room to add chargers.

6.2 Policy Support

- PM E-DRIVE earmarks ₹2,000 crore for about 72,300 public charging stations, with 22,100 fast chargers for e-4W on 50 national-highway corridors^[4].
- Karnataka is India's second-largest electric-car market, with 24,201 e-car sales in FY 2025-26^[2].

6.3 Target Customers

Segment	Need	How it is served
Private electric-car owners on NH-67	Fast top-up on Hubballi–Gadag–Koppal trips	120 kW and 30 kW chargers, app payment
Long-distance travellers and tourists	En-route charging on long trips	Highway frontage, canopy, signage
Taxi and cab operators	Quick turnaround, low cost per km	Fleet pricing, 24 × 7 operation
Intercity electric buses and goods vehicles	High-power charging at stops	120 kW charger, wide entry
Local EV owners in Gadag	Public charging where homes lack it	Short drive from Gadag town

6.4 SWOT

Strengths

Highway frontage · four guns, 150 kW · quoted, fixed-scope build · modular chargers

Weaknesses

Early-stage EV adoption in the district · single site · ramp-up in the first two years

Opportunities

Rising Karnataka EV sales · fleet tie-ups · PM E-DRIVE support, subject to eligibility · solar on canopy

Threats

New competing chargers · power-tariff changes · technology change

7. Technical Configuration

Component	Specification	Qty	Remarks
DC fast charger	Exicom, 120 kW, dual-gun DC	1	Price confirmed by promoter
DC fast charger	Exicom, 30 kW, dual-gun DC	1	Price confirmed by promoter
Transformer	200 kVA, 11/0.433 kV, ONAN, oil-filled, off-load tap changer, IS 1180	1	The Lynx quotation
HT switchgear	11 kV, 630 A, 25 kA, 3P VCB panel; HT metering cubicle; 400 A GOS with lightning arrester	1 set	The Lynx quotation
LT kiosk panel	400 A, 415 V, 3P+N; 250 A 4P MCCB (120 kW) and 63 A 4P MCCB (30 kW)	1	The Lynx quotation
Cables	3C × 95 sq mm 11 kV HT; 3.5C × 185 sq mm Al armoured LT; 4C × 70 / 4C × 16 sq mm Cu flexible	As per BOQ	The Lynx quotation
Earthing	12 copper-bonded pipe electrodes, 3 chemical electrodes, GI flat, Cu strip, Cu plate	1 set	The Lynx quotation
Canopy	Steel canopy over charging bays	1	Price confirmed by promoter

Exicom states that its Harmony DC range has efficiency above 95% and modular power from 60 kW to 400 kW^[10].

7.1 Standards & Compliance

- Transformer to IS 1180 (Amendment 4); HT installation to CEA regulations and Indian Electricity Rules, with CEIG inspection.
- Chargers: IEC 61851 series and applicable Indian EV charging standards; connector and communication protocol [\[confirm in Exicom datasheet\]](#).
- Fire safety: ABC extinguishers, fire buckets, danger boards and shock-treatment chart as per the quotation.
- Earthing designed with 12 pipe electrodes in the yard and 3 chemical electrodes at the chargers.

7.2 Design Note

The 150 kW of charging output at about 95% conversion efficiency draws roughly 158 kVA, within the 200 kVA transformer. Final design and drawings will be signed off by the project consultant before CEIG submission.

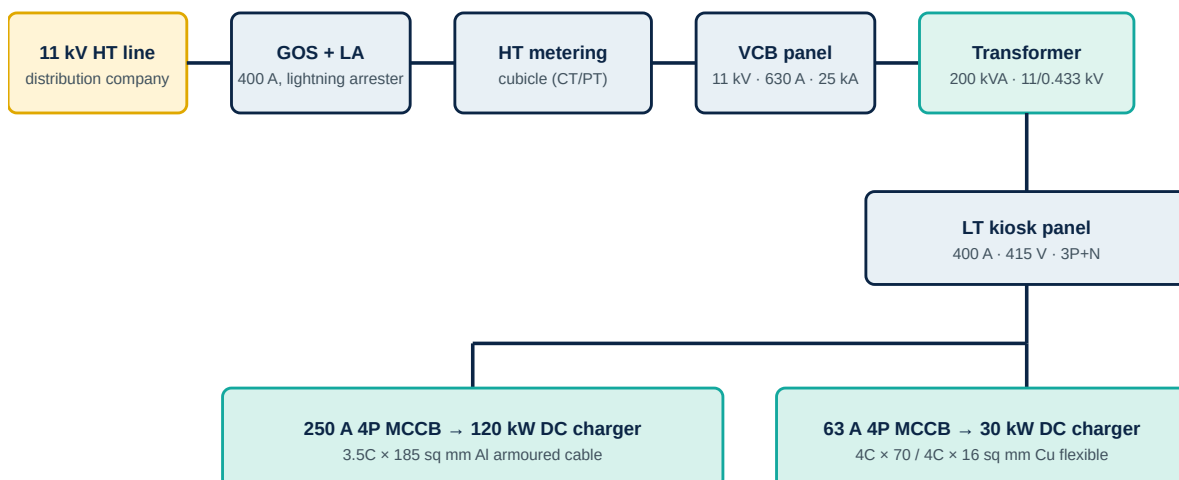


Figure 7.1 Single-line power flow.

8. Civil, Electrical & Equipment Scope

The scope below is taken from The Lynx quotation dated 06-10-2026 (59 items; full list in Annexure C).

Scope	Amount (₹)	Share
HT equipment (GOS, cubicle, VCB, transformer)	11,72,000	36.6%
Civil, site and finishing	6,86,426	21.4%
Cables, terminations and pipes	3,18,384	9.9%
Statutory and approvals	3,05,000	9.5%
Earthing	2,87,738	9.0%
LT panels and installation	2,50,000	7.8%
Project management and logistics	1,60,000	5.0%
Safety and fire	25,250	0.8%
Total (before GST)	32,04,798	100%

The 120 kW and 30 kW Exicom chargers (₹10.00 lakh and ₹4.60 lakh) and the canopy (₹2.50 lakh) are separate supply items priced by the promoter. [\[Attach Exicom and canopy quotations\]](#)

Quotation terms: installation and commissioning in 30–45 days from advance and approvals; payment 50% advance and 50% within 15 days of completion; warranty 12 months on the transformer and 6 months on other electrical equipment. Statutory fees (security deposit, CEIG, CT/PT testing, TAQC/MRT) are charged at actuals and are covered in the contingency.

9. Utilities, Manpower & Operations

9.1 Utilities

Power	11 kV HT supply, 200 kVA transformer; power is purchased per unit and re-sold as charging
Backup	Not required for charging; battery backup for CCTV and modem <i>[if specified]</i>
Water	Minimal; for cleaning only
Connectivity	DAS connectivity modem included in the quotation; 4G backup

9.2 Manpower Plan


Role	Number	Monthly salary (₹)	Annual cost (₹)
Station manager	1	18,000	2,16,000
Charging attendants (day and night shifts)	2	14,000	3,36,000
Total	3		5,52,000

Salaries are provisional and escalate at 5% a year in the model.

10. Project Cost

Cost head	₹ lakh	% share	Basis
Charging equipment (120 kW + 30 kW)	14.60	23.2%	Promoter-confirmed
Electrical and civil infrastructure	32.05	50.8%	Quotation (The Lynx)
Canopy	2.50	4.0%	Promoter-confirmed
GST @ 5%	2.46	3.9%	As confirmed by promoter
Total fixed assets	51.61	81.8%	
Contingency (5% of hard cost; covers statutory fees at actuals)	2.46	3.9%	Provisional
Working-capital margin	9.00	14.3%	Provisional
Total project cost	63.06	100.0%	₹63,06,278

Project cost split

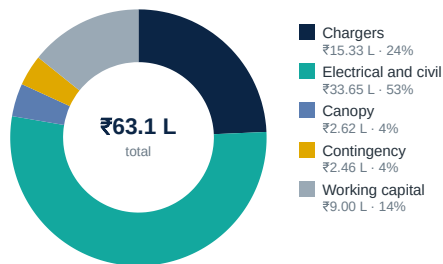

Fixed assets include 5% GST on every line. The quoted items are firm; the contingency and working-capital margin are provisional and will be set to the distribution company's demand note and the bank's norms.

11. Means of Finance

Source	₹ lakh	% of project cost	Remarks
Term loan	37.80	60%	36-month moratorium on principal; 60 monthly instalments; interest 10.5% (provisional)
Promoter contribution	25.26	40%	Own funds, paid upfront
Total	63.06	100%	

Debt–equity ratio at inception: **1.50 : 1**. Promoter share of project cost: **40%**.

Interest during construction. Interest during the 16-week build is met from the promoter's contribution. After commissioning, interest is serviced monthly through the moratorium from operating cash and the working-capital margin.

For reference, a 2024 MSME loan for EV charging stations through a Bank of India tie-up was announced from 9.35% with a 15% margin and tenor up to 10 years^[12].


12. Operating Assumptions

Parameter	Assumption	Source / basis
Traffic at site, Year 1	12,000 vehicles/day (both directions); +5% a year to Year 8, +3% after	Site estimate; confirmed by traffic count
Cars in traffic mix	35%	National-highway mix
Electric share of passing cars	1.0% in Year 1 rising to 4.2% by Year 8	Karnataka e-car growth [2][3]
Share of passing EVs that charge	10% in Year 1 rising to 17% by Year 6	Provisional
Energy per session	25 kWh	Provisional
Selling price	₹20 per kWh before GST, held flat	Provisional; owner sets
Power purchase cost	₹7 per kWh, all-in	Provisional; distribution-company tariff
Payment and software fees	2.5% of revenue	Provisional
Staff	₹5,52,000 per year, +5% a year	Manpower plan
Operation and maintenance	0.6% of equipment and electrical cost, +5% a year	Provisional
Insurance	0.3% of fixed assets a year	Provisional
Administration and marketing	₹1.10 lakh a year, +5% a year	Provisional
Rent	Nil (land owned by promoter) [confirm]	Provisional
Depreciation	Straight line: chargers 8 yrs; electrical 15 yrs; civil 20 yrs; canopy 15 yrs; contingency 10 yrs	Company-law style useful lives
Income tax	25%, with losses carried forward	Provisional
Loan	10.5% a year; 36-month moratorium; 60 monthly instalments; monthly calculation	Provisional; per bank sanction

This is an appraisal model prepared from the quotation, promoter-confirmed prices and public data. It is not a guarantee of results.

13. Revenue & Operating Cost Projections (Y1–Y8)

₹ lakh unless stated	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
Vehicles per day	12,000	12,600	13,230	13,892	14,586	15,315	16,081	16,885
EV cars passing per day	42	66	93	122	153	188	220	248
Charging sessions per day	4.2	7.9	13.0	18.2	24.5	31.9	37.3	42.2
Energy sold (kWh per day)	105	198	324	456	613	797	933	1,055
Use of 150 kW	3%	6%	9%	13%	17%	22%	26%	29%
Price (₹ per kWh)	20	20	20	20	20	20	20	20
Total revenue	7.67	14.49	23.66	33.27	44.72	58.21	68.10	77.01
Power purchase	2.68	5.07	8.28	11.65	15.65	20.37	23.84	26.95
Payment and software fees	0.19	0.36	0.59	0.83	1.12	1.46	1.70	1.93
Staff	5.52	5.80	6.09	6.39	6.71	7.05	7.40	7.77
Operation and maintenance	0.24	0.25	0.26	0.28	0.29	0.30	0.32	0.34
Insurance	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
Administration	0.60	0.63	0.66	0.69	0.73	0.77	0.80	0.84
Marketing	0.50	0.53	0.55	0.58	0.61	0.64	0.67	0.70
Total operating cost	9.89	12.79	16.59	20.57	25.26	30.74	34.88	38.68
EBITDA	(2.22)	1.70	7.07	12.70	19.46	27.47	33.22	38.32
EBITDA margin	-29%	12%	30%	38%	44%	47%	49%	50%

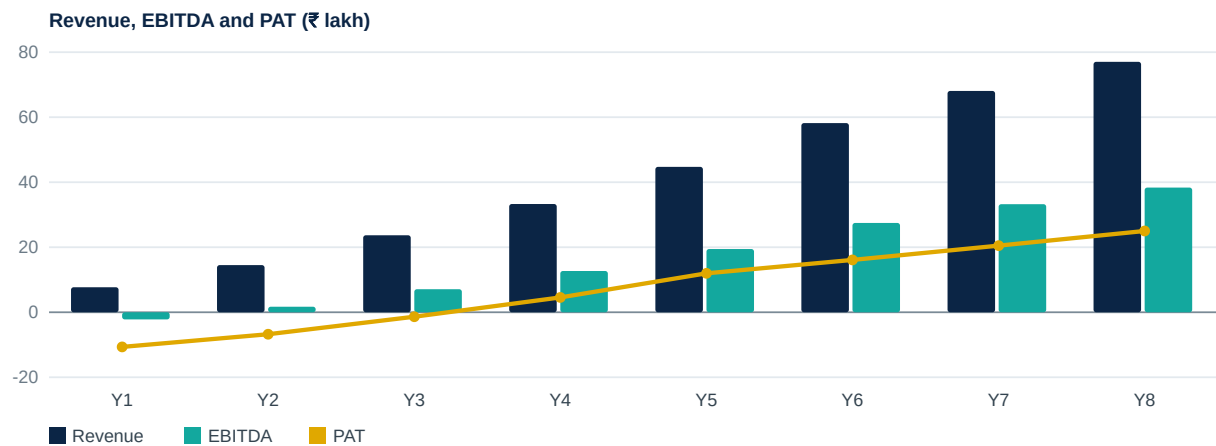

Year 1 is the first 12 months of operation. Revenue excludes GST.

14. Projected Profitability Statement

₹ lakh	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
Revenue	7.67	14.49	23.66	33.27	44.72	58.21	68.10	77.01
Operating cost	(9.89)	(12.79)	(16.59)	(20.57)	(25.26)	(30.74)	(34.88)	(38.68)
EBITDA	(2.22)	1.70	7.07	12.70	19.46	27.47	33.22	38.32
Interest on term loan	(3.97)	(3.97)	(3.97)	(3.68)	(3.01)	(2.27)	(1.45)	(0.53)
Depreciation	(4.46)	(4.46)	(4.46)	(4.46)	(4.46)	(4.46)	(4.46)	(4.46)
Profit before tax	(10.65)	(6.73)	(1.36)	4.56	11.98	20.74	27.31	33.33
Tax @ 25%	0.00	0.00	0.00	0.00	0.00	(4.64)	(6.83)	(8.33)
Profit after tax	(10.65)	(6.73)	(1.36)	4.56	11.98	16.10	20.48	25.00
Cash accruals (PAT + depreciation)	(6.19)	(2.27)	3.10	9.02	16.45	20.56	24.94	29.46
PAT % of revenue	-139%	-46%	-6%	14%	27%	28%	30%	32%

Operating costs, interest and tax are shown as deductions; brackets show negatives. Tax is nil until accumulated losses are absorbed.

15. Projected Cash Flow Statement

Year 0 sources and uses. Sources: term loan ₹37.80 lakh and promoter contribution ₹25.26 lakh, total ₹63.06 lakh. Uses: fixed assets ₹51.61 lakh, contingency ₹2.46 lakh and working-capital margin ₹9.00 lakh, which is the opening cash balance.

₹ lakh	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
Opening cash	9.00	2.81	0.54	3.64	6.59	16.30	29.39	46.03
Add: profit after tax	(10.65)	(6.73)	(1.36)	4.56	11.98	16.10	20.48	25.00
Add: depreciation	4.46	4.46	4.46	4.46	4.46	4.46	4.46	4.46
Less: loan repayment	0.00	0.00	0.00	(6.07)	(6.74)	(7.48)	(8.30)	(9.22)
Closing cash	2.81	0.54	3.64	6.59	16.30	29.39	46.03	66.27

16. Projected Balance Sheet

₹ lakh	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
Liabilities								
Promoter capital	25.26	25.26	25.26	25.26	25.26	25.26	25.26	25.26
Reserves and surplus (cumulative PAT)	(10.65)	(17.38)	(18.74)	(14.18)	(2.20)	13.91	34.39	59.39
Term loan outstanding	37.80	37.80	37.80	31.73	25.00	17.52	9.22	0.00
Total liabilities	52.41	45.68	44.32	42.81	48.06	56.69	68.87	84.65
Assets								
Net fixed assets	49.60	45.14	40.68	36.22	31.76	27.30	22.84	18.38
Cash and bank	2.81	0.54	3.64	6.59	16.30	29.39	46.03	66.27
Total assets	52.41	45.68	44.32	42.81	48.06	56.69	68.87	84.65

16.1 Key Ratios

Ratio	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
Debt–equity (×)	2.59	4.80	5.80	2.86	1.08	0.45	0.15	0.00
Fixed-asset coverage of loan (×)	1.31	1.19	1.08	1.14	1.27	1.56	2.48	—
Interest coverage, EBITDA ÷ interest (×)	-0.56	0.43	1.78	3.45	6.46	12.09	22.95	71.96
ROCE, EBIT ÷ (equity + loan)	-12.8%	-6.0%	5.9%	19.2%	31.2%	40.6%	41.8%	40.0%

17. Depreciation Schedule

Asset class	Cost (₹ lakh)	Life (yrs)	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
Charging equipment (120 kW + 30 kW)	15.33	8	1.92	1.92	1.92	1.92	1.92	1.92	1.92	1.92
HT / LT electrical infrastructure	26.44	15	1.76	1.76	1.76	1.76	1.76	1.76	1.76	1.76
Civil and site works	7.21	20	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
Canopy	2.62	15	0.17	0.17	0.17	0.17	0.17	0.17	0.17	0.17
Contingency and pre-operative	2.46	10	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Total depreciation	54.06		4.46	4.46	4.46	4.46	4.46	4.46	4.46	4.46
Net block (closing)			49.60	45.14	40.68	36.22	31.76	27.30	22.84	18.38

Straight-line method on the cost of each asset class, including 5% GST. The model uses useful lives shown; tax depreciation may differ.

18. Loan Repayment Schedule & DSCR

Term loan ₹37.80 lakh at 10.5% a year. Interest only for 36 months, then 60 equal monthly instalments of ₹81,247. The month-by-month schedule is in Annexure B.

₹ lakh	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
Opening balance	37.80	37.80	37.80	37.80	31.73	25.00	17.52	9.22
Interest	3.97	3.97	3.97	3.68	3.01	2.27	1.45	0.53
Principal repaid	0.00	0.00	0.00	6.07	6.74	7.48	8.30	9.22
Total debt service	3.97	3.97	3.97	9.75	9.75	9.75	9.75	9.75
Closing balance	37.80	37.80	37.80	31.73	25.00	17.52	9.22	0.00

18.1 DSCR

DSCR = (PAT + depreciation + interest) ÷ (interest + principal), calculated in each year of principal repayment. The target is at least 1.25× minimum and 1.5× average.

DSCR	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8
PAT + depreciation + interest	(2.22)	1.70	7.07	12.70	19.46	22.84	26.39	29.99
Interest + principal	3.97	3.97	3.97	9.75	9.75	9.75	9.75	9.75
DSCR (x)	moratorium	moratorium	moratorium	1.30	2.00	2.34	2.71	3.08

₹81,247

Monthly instalment

1.30×

Minimum DSCR


2.28×

Average DSCR

36 + 60

Moratorium + instalments
(months)

DSCR by year, repayment period (benchmark 1.25×)

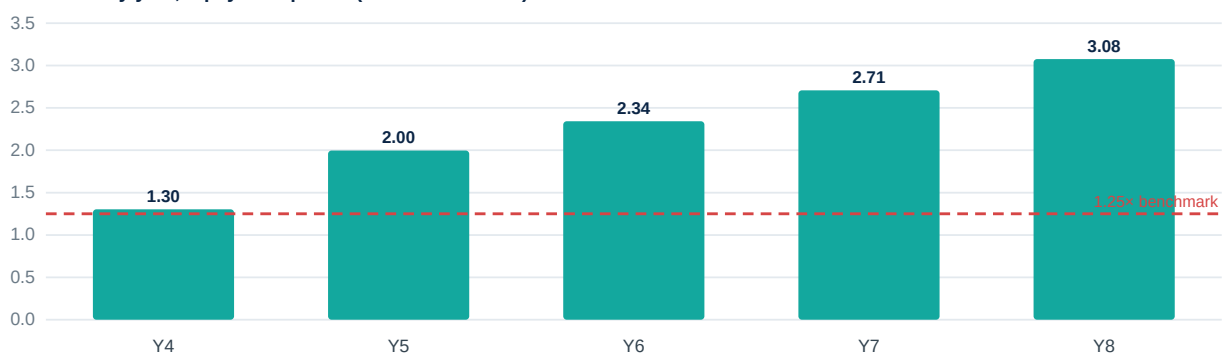

19. Key Financial Indicators

Project IRR (10 years, no terminal value, working capital recovered in Year 10)	16.5%
Equity IRR	20.6%
NPV at 12% discount rate	₹19.75 lakh
Payback period	6.1 years
Average DSCR (repayment period)	2.28×
Minimum DSCR (repayment period)	1.30×
Contribution margin	₹12.50 per kWh (62% of selling price)
Cash break-even (Year 3 cost base, incl. interest)	93,484 kWh a year · 256 kWh a day · 7.1% use
Accounting break-even (incl. depreciation)	97,414 kWh a year · 267 kWh a day · 7.4% use

Project cash flow = EBITDA – tax; investment = total project cost; no residual value is counted for equipment.

20. Sensitivity Analysis

Scenario	Y1 revenue (₹ L)	Y1 EBITDA (₹ L)	Min DSCR	Avg DSCR	Project IRR
Base case	7.67	(2.22)	1.30	2.28	16.5%
Traffic -20%	6.13	(3.18)	0.88	1.77	11.4%
Selling price -10%	6.90	(2.97)	0.97	1.89	12.6%
Power cost +10%	7.67	(2.49)	1.18	2.14	15.2%
Operating costs +10%	7.67	(2.92)	1.22	2.23	15.6%
Combined: traffic -10%, price -5%, power +5%	6.55	(3.16)	0.89	1.78	11.6%
Severe downside: traffic -30%, price -10%, power +10%	4.83	(4.37)	0.35	1.07	3.7%
Upside: traffic +15%, price +5%	9.26	(1.07)	1.81	2.90	21.7%

DSCR is measured over the repayment period (Years 4–8). Traffic is the main driver: every 1,000 vehicles a day moves Year-5 revenue by about ₹3.7 lakh. Selling price and power cost move margins by ₹1 per kWh for every ₹1 change. The moratorium, the working-capital margin and the 40% promoter contribution give headroom against a slower ramp-up.

21. Implementation Schedule

Weeks from work order and advance. The quotation allows 30–45 days for installation and commissioning once the advance and approvals are in place.

Activity	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Depends on
Site survey, soil test, 7-day traffic count																	—
Land documents; road-entry permission																	—
Distribution-company sanction; CEIG drawing approval																	Land documents
Order Exicom chargers																	Loan sanction
Civil: foundations, trenching, fencing, paving																	Approvals
HT yard: GOS, VCB, cubicle, transformer, LT kiosk																	Civil works
Charger and canopy installation; earthing; cabling																	Equipment delivery
CEIG inspection, meter, commissioning																	All installation

22. Statutory Approvals & Documentation Checklist

Document / approval	Status	To be attached
Vendor quotation (The Lynx), 06-10-2026	Available	Annexure C
Exicom charger quotation (120 kW and 30 kW)	Estimated	Price confirmed by promoter; [attach quotation]
Canopy quotation	Estimated	Price confirmed by promoter; [attach quotation]
Distribution-company feasibility and sanction	Pending	Application and demand note
CEIG drawing approval and inspection	Pending	Approval letter
CT/PT meter testing; TAQC/MRT	Pending	Test certificates
Road-entry permission	Pending	NHAI / PWD letter
Land documents (RTC, khata, EC) and land-use status	Pending	[Attach]
Udyam and GST registration	Pending	[Attach]
Traffic survey report (7 days)	Pending	Survey sheets, photographs
Promoter KYC, ITR, bank statements, net worth	Pending	[Attach]

23. Risk Analysis & Mitigation

Risk	Impact	Rating	Mitigation
Traffic lower than estimated	High	High	7-day site count before sanction; moratorium and working-capital margin; phase operations
Slow EV uptake in district	Medium	Medium	Fleet and taxi tie-ups; highway and tourist traffic from outside district
Power tariff above assumption	Medium	Medium	Confirm EV tariff in writing; solar on canopy
Competing chargers on NH-67	Medium	Medium	First-mover position; visibility; uptime
Approval delays (sanction, CEIG, road access)	Medium	Medium	Apply early; contingency for fees; release funds against approvals
Equipment downtime	Medium	Low	Exicom warranty and AMC; 6–12 month warranties per quotation
Technology change	Low	Low	Modular chargers; space to add units
Cost overrun	Medium	Low	Quoted rates; 5% contingency
Fire or electrical hazard	High	Low	Fire kit, earthing, CEIG inspection; fire and third-party insurance

24. Environmental, Social & Safety Considerations

- **Emissions:** electric charging has no tailpipe emissions; at 25 kWh per session the station supports about 224 MWh of electric driving a year by Year 5.
- **Waste:** transformer oil is contained in the yard; construction debris is removed from site as per the quotation.
- **Employment:** three direct jobs plus local contractors during construction.
- **Safety:** earthing, fire extinguishers, fire buckets, danger boards, shock-treatment chart, bollards, car stoppers and fencing; CEIG inspection before energising.
- **Accessibility:** reserved parking signage and paved, level bays.
- **Future scope:** solar on the canopy, additional chargers within the 200 kVA headroom, and fleet charging contracts.

25. Conclusion

The project is a 63.06 lakh investment in a four-gun, 150 kW public DC fast-charging station on NH-67 near Gadag, with quoted or promoter-confirmed prices for 82% of the cost. On the stated assumptions it earns a project IRR of 16.5% and an equity IRR of 20.6%, with a minimum DSCR of 1.30× and an average of 2.28× over the repayment period.

Conditions before sanction: 7-day traffic count; distribution-company sanction and tariff; CEIG approval; road-entry permission; Exicom and canopy quotations; land documents.

The promoter requests a **term loan of ₹37.80 lakh (60% of project cost)** with a 36-month moratorium and 60 monthly instalments.

The bank is requested to carry out its own independent appraisal. Figures in this report are projections based on the stated assumptions and are not a guarantee of results.

Declaration by Promoter

I declare that the information in this report is true and correct to the best of my knowledge, and that I will provide any further information the bank requires.

Name	Mr. Manjunath
Designation	Promoter / Proprietor
Signature	
Place	[place]
Date	[dd-mm-yyyy]


Abbreviations

Term	Meaning	Term	Meaning
BOQ	Bill of quantities	DSCR	Debt service coverage ratio
CEIG	Chief Electrical Inspector to Government	EBITDA	Earnings before interest, tax, depreciation and amortisation
GOS	Gang-operated switch	HT / LT	High tension / low tension
IRR / NPV	Internal rate of return / net present value	MCCB	Moulded-case circuit breaker
VCB	Vacuum circuit breaker	PAT	Profit after tax


References

1. India EV registrations 2025 (Vahan data) — <https://newsonair.gov.in/indias-electric-vehicle-market-accounts-for-8-of-new-vehicle-registrations-in-2025-vahan-portal-data/>
2. Karnataka electric-car sales FY 2025-26 (EVreporter, Vahan) — <https://evreporter.com/state-wise-electric-car-penetration-in-india-in-fy-2025-26/>
3. Karnataka e-4W registrations FY 2023-24, 2024-25 and EV share (Deccan Herald) — <https://www.deccanherald.com/india/karnataka/bengaluru/bengaluru-all-charged-up-for-evs-but-lax-charging-infra-gives-buyers-a-shock-3684174>
4. PM E-DRIVE public charging guidelines (Outlook Business) — <https://www.outlookbusiness.com/ampstories/planet/industry/centre-launches-guidelines-for-72300-ev-charging-stations-under-pm-e-drive-scheme-details-here>
5. Gadag district, Census 2011 (citypopulation.de) — https://www.citypopulation.de/en/india/karnataka/admin/561_gadag
6. Gadag-Betageri (Wikipedia) — <https://en.wikipedia.org/wiki/Gadag-Betageri>
7. EV charging stations in Gadag (91trucks directory) — <https://www.91trucks.com/electric/charging-stations/gadag>
8. National Highway 67 (Wikipedia) — [https://en.wikipedia.org/wiki/National_Highway_67_\(India\)](https://en.wikipedia.org/wiki/National_Highway_67_(India))
9. NHAI Hubballi–Hosapete project award (ITLN) — <https://www.itln.in/road-transport-nhai-awards-contract-for-two-highway-development-projects-in-karnataka>
10. Exicom Harmony DC chargers (Exicom newsroom) — <https://exicom.in/newsroom/exicom-launches-indias-fastest-dc-charger-engineered-to-make-ev-charging-experience-effortless>
11. District populations, Census 2011 (citypopulation.de, Karnataka) — https://citypopulation.de/en/india/admin/29_karnataka/
12. Bank of India MSME loan for EV charging stations, July 2024 (pv magazine India) — <https://www.pv-magazine-india.com/2024/07/26/tata-power-solar-partners-with-bank-of-india-for-low-cost-finance-to-rooftop-solar-and-ev-charging-station-customers/>
13. Vendor quotation: The Lynx, dated 06-10-2026 (Annexure C)
14. Charger and canopy prices: as confirmed by the promoter
15. Site markup and map location: supplied by the promoter; satellite imagery © Esri, Maxar, Earthstar Geographics

Annexure A: Site Plan

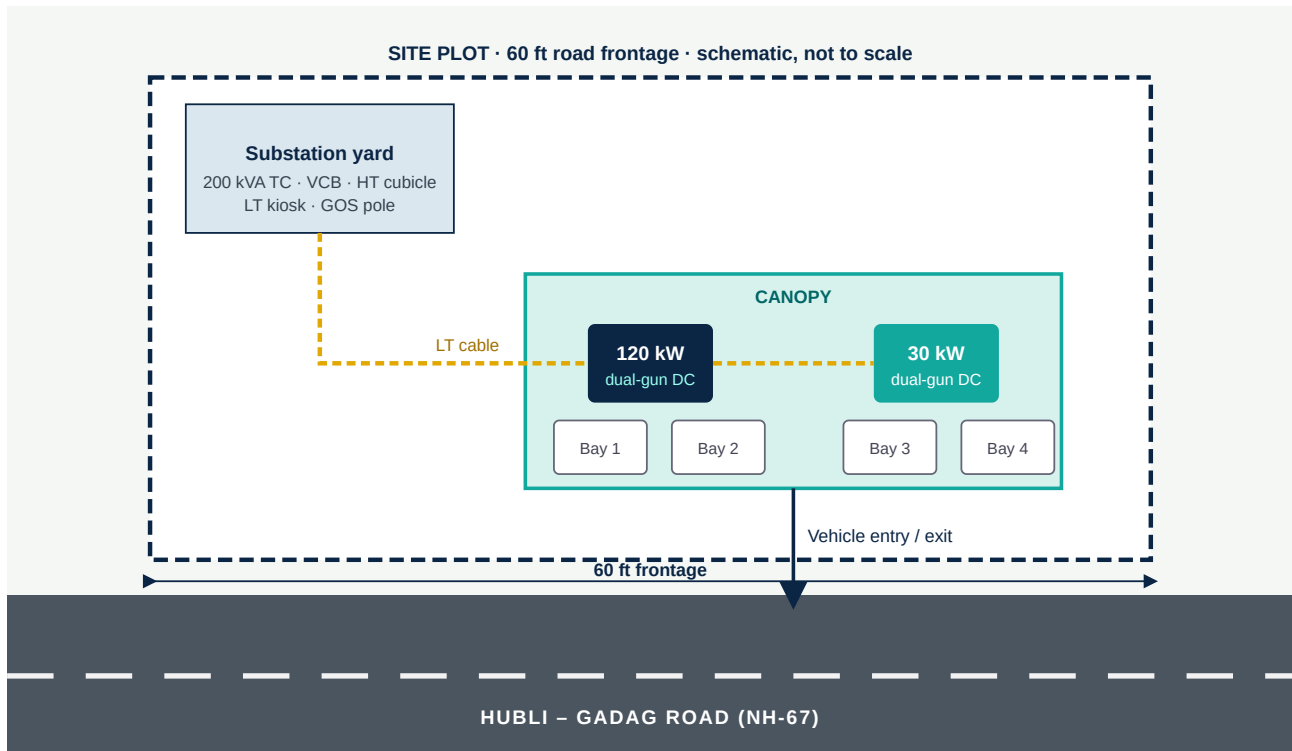

Schematic site plan, not to scale. Final layout subject to plot survey.

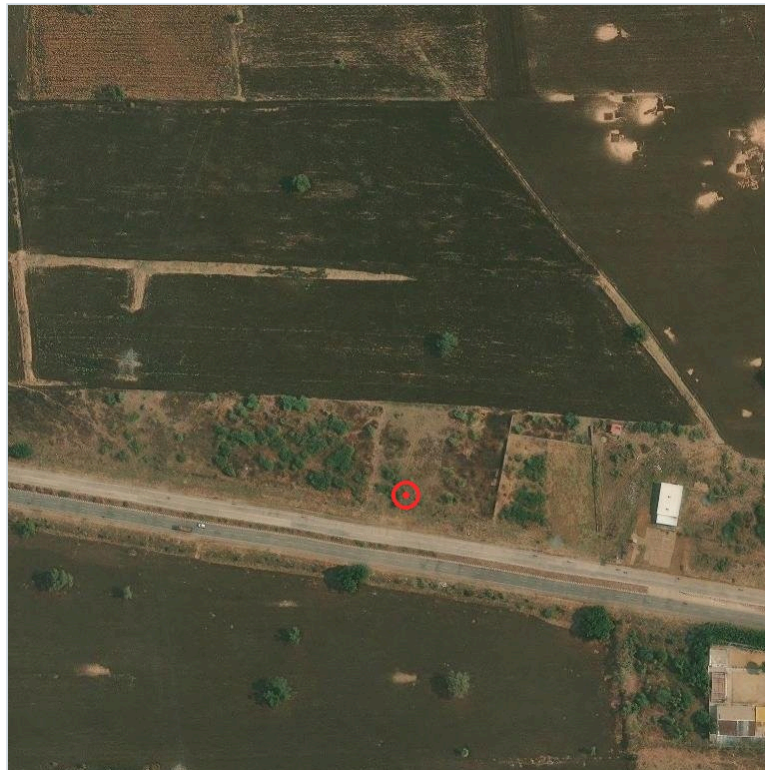

Satellite close-up (~440 m across); red ring marks the plot.

Annexure B: Monthly Loan Amortisation

₹37,80,000 at 10.5% a year; interest-only for 36 months, then 60 instalments of ₹81,247 (rupees).

Mo.	Opening	Interest	Principal	Closing	Mo.	Opening	Interest	Principal	Closing
1	37,80,000	33,075	0	37,80,000	49	31,73,290	27,766	53,481	31,19,809
2	37,80,000	33,075	0	37,80,000	50	31,19,809	27,298	53,949	30,65,861
3	37,80,000	33,075	0	37,80,000	51	30,65,861	26,826	54,421	30,11,440
4	37,80,000	33,075	0	37,80,000	52	30,11,440	26,350	54,897	29,56,543
5	37,80,000	33,075	0	37,80,000	53	29,56,543	25,870	55,377	29,01,166
6	37,80,000	33,075	0	37,80,000	54	29,01,166	25,385	55,862	28,45,304
7	37,80,000	33,075	0	37,80,000	55	28,45,304	24,896	56,351	27,88,954
8	37,80,000	33,075	0	37,80,000	56	27,88,954	24,403	56,844	27,32,110
9	37,80,000	33,075	0	37,80,000	57	27,32,110	23,906	57,341	26,74,769
10	37,80,000	33,075	0	37,80,000	58	26,74,769	23,404	57,843	26,16,926
11	37,80,000	33,075	0	37,80,000	59	26,16,926	22,898	58,349	25,58,577
12	37,80,000	33,075	0	37,80,000	60	25,58,577	22,388	58,859	24,99,718
13	37,80,000	33,075	0	37,80,000	61	24,99,718	21,873	59,374	24,40,344
14	37,80,000	33,075	0	37,80,000	62	24,40,344	21,353	59,894	23,80,450
15	37,80,000	33,075	0	37,80,000	63	23,80,450	20,829	60,418	23,20,032
16	37,80,000	33,075	0	37,80,000	64	23,20,032	20,300	60,947	22,59,085
17	37,80,000	33,075	0	37,80,000	65	22,59,085	19,767	61,480	21,97,605
18	37,80,000	33,075	0	37,80,000	66	21,97,605	19,229	62,018	21,35,587
19	37,80,000	33,075	0	37,80,000	67	21,35,587	18,686	62,561	20,73,027
20	37,80,000	33,075	0	37,80,000	68	20,73,027	18,139	63,108	20,09,919
21	37,80,000	33,075	0	37,80,000	69	20,09,919	17,587	63,660	19,46,258
22	37,80,000	33,075	0	37,80,000	70	19,46,258	17,030	64,217	18,82,041
23	37,80,000	33,075	0	37,80,000	71	18,82,041	16,468	64,779	18,17,262
24	37,80,000	33,075	0	37,80,000	72	18,17,262	15,901	65,346	17,51,916
25	37,80,000	33,075	0	37,80,000	73	17,51,916	15,329	65,918	16,85,999
26	37,80,000	33,075	0	37,80,000	74	16,85,999	14,752	66,494	16,19,504
27	37,80,000	33,075	0	37,80,000	75	16,19,504	14,171	67,076	15,52,428
28	37,80,000	33,075	0	37,80,000	76	15,52,428	13,584	67,663	14,84,765
29	37,80,000	33,075	0	37,80,000	77	14,84,765	12,992	68,255	14,16,509
30	37,80,000	33,075	0	37,80,000	78	14,16,509	12,394	68,852	13,47,657
31	37,80,000	33,075	0	37,80,000	79	13,47,657	11,792	69,455	12,78,202
32	37,80,000	33,075	0	37,80,000	80	12,78,202	11,184	70,063	12,08,139
33	37,80,000	33,075	0	37,80,000	81	12,08,139	10,571	70,676	11,37,464
34	37,80,000	33,075	0	37,80,000	82	11,37,464	9,953	71,294	10,66,169
35	37,80,000	33,075	0	37,80,000	83	10,66,169	9,329	71,918	9,94,252
36	37,80,000	33,075	0	37,80,000	84	9,94,252	8,700	72,547	9,21,704
37	37,80,000	33,075	48,172	37,31,828	85	9,21,704	8,065	73,182	8,48,522
38	37,31,828	32,653	48,593	36,83,235	86	8,48,522	7,425	73,822	7,74,700
39	36,83,235	32,228	49,019	36,34,216	87	7,74,700	6,779	74,468	7,00,232
40	36,34,216	31,799	49,448	35,84,768	88	7,00,232	6,127	75,120	6,25,112
41	35,84,768	31,367	49,880	35,34,888	89	6,25,112	5,470	75,777	5,49,334
42	35,34,888	30,930	50,317	34,84,572	90	5,49,334	4,807	76,440	4,72,894
43	34,84,572	30,490	50,757	34,33,815	91	4,72,894	4,138	77,109	3,95,785
44	34,33,815	30,046	51,201	33,82,614	92	3,95,785	3,463	77,784	3,18,001
45	33,82,614	29,598	51,649	33,30,964	93	3,18,001	2,783	78,464	2,39,537

Mo.	Opening	Interest	Principal	Closing
46	33,30,964	29,146	52,101	32,78,863
47	32,78,863	28,690	52,557	32,26,307
48	32,26,307	28,230	53,017	31,73,290

Mo.	Opening	Interest	Principal	Closing
94	2,39,537	2,096	79,151	1,60,386
95	1,60,386	1,403	79,844	80,542
96	80,542	705	80,542	0

Annexure C1: Vendor Quotation, The Lynx (page 1 of 6)



QUOTATION

Date: 06-10-2026

Subject: Quotation for SONAREV EV Charging Station, Gadag, Karnataka

Dear Sir,

We are pleased to submit our quotation for the EV Charging Station, Gadag, Karnataka

SL NO	SERVICE TYPE	HEADING	TECHNICAL DESCRIPTION	UNIT	QTY	RATE	AMOUNT
1	Power Infra	Statutory	BESCOM Approval, Sanction & Clearance Charges	LOT	1	2,25,000	2,25,000
2	Power Infra	Statutory	CEIG, TAQC & MRT Statutory Charges	LOT	1	80,000	80,000
3	Power Infra	Statutory	2 MMD Security Deposit, Electrical Inspectorate/CEIG drawing, inspection fees, CT/PT & HT meter Testing, TAQC/MRT charges, and other fees against receipts.	EA	1	ACTUALS	-
4	Power Infra	Safety	Supply & Installation of 11 kV Danger Warning Board	NOS	2	250	500
5	Power Infra	Safety	Supply & Installation of 9 Ltr Fire Bucket with Stand – 3-Bucket Set	SET	1	4,000	4,000
6	Power Infra	Safety	Supply & Installation of 9 kg ABC Type Fire Extinguisher	NOS	2	4,500	9,000
7	Power Infra	Safety	Supply & Installation of 11 kV Electrical Shock Treatment Chart	NOS	1	500	500
8	Power Infra	Safety	Supply & Installation of HT/LT Cable Route Marker – Cast Iron	NOS	2	400	800
9	Power Infra	PVC Pipe	Supply & Laying of 100 mm PVC/DWC Cable Protection Pipe	MTR	40	250	10,000
10	Power Infra	GOS	Supply & Installation of Spun Pole / DP Arrangement with 400 A GOS, Lightning	LOT	1	1,44,000	1,44,000

13/2, K Gollahalli, Bangalore South, Bangalore 60
Civil / Mechanical / Electrical / Telecom / IT

Annexure C2: Vendor Quotation, The Lynx (page 2 of 6)



			Arrester, Earthing & Concreting				
11	Power Infra	HT Cubicle	Supply, Installation, Testing & Commissioning of HT Metering Cubicle	SET	1	2,52,000	2,52,000
12	Power Infra	VCB	Supply, Installation, Testing & Commissioning of 11 kV, 630 A, 25 kA, 3P VCB Panel	SET	1	3,51,000	3,51,000
13	Power Infra	TC	Supply, Installation, Testing & Commissioning of 200 kVA, 11/0.433 kV, Alum-Wound, Outdoor, Oil-Filled, ONAN Transformer with Off-Load Tap Changer, Level-2, as per IS 1180 Amendment-4,	NOS	1	4,25,000	4,25,000
14	Power Infra	Cable	Supply & Laying of 3C x 95 Sq.mm, 11 kV Grade HT Cable	MTR	44	1,380	60,720
15	Power Infra	Potted	Supply & Installation of 3C x 95 Sq.mm HT Cable Indoor Termination Kit	NOS	6	5,400	32,400
16	Power Infra	Potted	Supply & Installation of 3C x 95 Sq.mm HT Cable Outdoor Termination Kit	NOS	2	6,000	12,000
17	Power Infra	Cable	Supply & Laying of 3.5C x 120 Sq.mm Al XLPE Armoured Cable	MTR	14	995	13,930
18	Power Infra	Termination	Supply & Installation of End Termination for 3.5C x 120 Sq.mm Al Armoured Cable , including Glanding, Al Lugs & Accessories	NOS	4	3,335	13,340
19	Power Infra	LT Kiosk Panel	Supply, Installation, Testing & Commissioning of LT Kiosk Panel 400 A, 415 V, 3P+N LT Panel with 400 A, 4P incomer and outgoing feeders comprising 1 x 250 A, 4P MCCB for 120 kW EV Charger and 1 x 63 A, 4P MCCB for 30 kW EV Charger, complete with copper busbar, metering, protection, control wiring, cable termination and all necessary	SET	1	2,25,000	2,25,000

13/2, K Gollahalli, Bangalore South, Bangalore 60
Civil / Mechanical / Electrical / Telecom / IT

Annexure C3: Vendor Quotation, The Lynx (page 3 of 6)



			accessories.				
20	Power Infra	Earthing	Supply & Installation of Copper-Bonded Pipe Earthing Electrode with Accessories	NOS	12	12,250	1,47,000
21	Power Infra	Earthing	Supply & Laying of 50 × 6 mm GI Earthing Flat	MTR	41	400	16,400
22	Power Infra	Earthing	Supply & Installation of 600 × 600 × 3 mm Copper Plate Earthing for Transformer Neutral	NOS	2	31,500	63,000
23	Power Infra	Earthing	Supply & Laying of 25 × 3 mm Copper Earthing Strip	MTR	12	1,524	18,288
24	Power Infra	Trenching	Cable Trench Excavation in Hard Soil , including Backfilling & Compaction	CUM	26	2,200	57,323
25	Power Infra	Fencing	Supply & Installation of Chain-Link Fencing	SQM	55	1,615	88,303
26	Power Infra	40 mm Jelly	Supply & Laying of 40 mm Jelly in Switchyard	LOT	1	16,500	16,500
27	Power Infra	Das	Supply & Installation of DAS Connectivity Modem	NOS	1	12,000	12,000
28	Power Infra	Civil Work	Construction of RCC Foundations for HT Equipment, Transformer, HT Cubicle, GOS, VCB, LT Kiosk, etc.	NOS	1	95,000	95,000
29	Power Infra	Logistics	Transportation, Loading & Unloading of Materials to Site	LOT	1	50,000	50,000
30	Power Infra	Service	PMC Charges – Project Management, Site Supervision & Coordination for EV Charging Project	LOT	1	1,00,000	1,00,000
31	Charging Infra	Cable	Supply & Laying of 3.5C × 185 Sq.mm Aluminium Armoured Cable	MTR	30	1,374	41,220
32	Charging Infra	Termination	Supply & Installation of End Termination for 3.5C × 185 Sq.mm Al Cable , including Gland, Lugs & Sleeves	NOS	4	2,500	10,000

13/2, K Gollahalli, Bangalore South, Bangalore 60
Civil / Mechanical / Electrical / Telecom / IT

Annexure C4: Vendor Quotation, The Lynx (page 4 of 6)



33	Charging Infra	Civil Work	Providing RCC M20 Charger Foundation, 4700 × 1000 × 400 mm , with 8 mm TMT Reinforcement @ 150 mm C/C Vertical & 300 mm C/C Horizontal, including PVC Cable Sleeves, Shuttering, Pumping, Finishing & Admixtures	NOS	1	47,500	47,500
34	Charging Infra	Civil Work	Providing PCC Foundation in 1:1.5:3 Mix, 1000 × 1000 × 500 mm , including 250 mm below & 250 mm above Ground Level	NOS	1	7,500	7,500
35	Charging Infra	Cable	Supply & Laying of 4C × 70 Sq.mm Copper Flexible Cable	MTR	10	5,880	58,800
36	Charging Infra	Termination	Supply & Installation of End Termination for 4C × 70 Sq.mm Cu Cable , including Lugs & Sleeves	NOS	2	1,755	3,510
37	Charging Infra	Cable	Supply & Laying 1C × 50 Sq.mm Green Copper Flexible Cable	MTR	12	984	11,808
38	Charging Infra	Termination	Supply & Installation of End Termination for 1C × 50 Sq.mm Cu Flexible Cable , including Lugs & Sleeves	NOS	2	565	1,130
39	Charging Infra	Cable	Supply & Laying 4C × 16 Sq.mm Copper Flexible Cable	MTR	10	1,212	12,120
40	Charging Infra	Termination	Supply & Installation of End Termination for 4C × 16 Sq.mm Cu Cable , including Lugs & Sleeves	NOS	2	675	1,350
41	Charging Infra	Cable	Supply & Laying 1C × 16 Sq.mm Green Copper Flexible Cable	MTR	12	288	3,456
42	Charging Infra	Termination	Supply & Installation of End Termination for 1C × 16 Sq.mm Cu Flexible Cable , including Lugs & Sleeves	NOS	2	200	400
43	Charging Infra	Hdpe Pipe	Supply & Laying 110 mm OD HDPE Cable Protection Pipe	MTR	70	450	31,500

13/2, K Gollahalli, Bangalore South, Bangalore 60
Civil / Mechanical / Electrical / Telecom / IT

Annexure C5: Vendor Quotation, The Lynx (page 5 of 6)



44	Charging Infra	Installation	Installation & Commissioning of 120 kW SG Dual-Gun DC Charger	NOS	1	6,000	6,000
45	Charging Infra	Installation	Installation & Commissioning of 30 kW SG Dual-Gun DC Charger	NOS	1	4,500	4,500
46	Charging Infra	Earthing	Supply & Laying GI Earth Strip 50 × 6 mm , including Joint Welding, Nuts & Bolts	MTR	20	315	6,300
47	Charging Infra	Earthing	Supply & Installation of 20 mm Dia × 3 m Long Copper-Bonded Chemical Earthing Electrode with Pit Cover & Accessories	NOS	3	12,250	36,750
48	Charging Infra	Installation	Installation of 300 kW / 630 A Electrical Panel	NOS	1	2,500	2,500
49	Charging Infra	Safety	Installation of Safety Bollards with Fasteners	NOS	4	350	1,400
50	Charging Infra	Safety	Supply & Installation of Vehicle Car Stopper	NOS	4	950	3,800
51	Charging Infra	Safety	Supply & Installation of Wall/Ground-Mounted Fire Extinguisher	NOS	1	5,000	5,000
52	Charging Infra	Safety	Installation of Reserved Parking Sign Board with Fasteners/Grouting	NOS	1	250	250
53	Charging Infra	Debris	Site Debris Removal & Surrounding Area Cleaning	LOT	2	2,500	5,000
54	Charging Infra	Service	One-Way Transportation from Vendor Base/Registered Office to Site, 251–450 km	NOS	1	10,000	10,000
55	Charging Infra	Trenching	Soft Trenching in Soil, including Excavation & Backfilling	CUM	33	1,600	52,800
56	Charging Infra	Termination	Supply & Installation of PU Foam for Cable/Conduit Openings	LOT	1	700	700
57	Charging Infra	Interlocking Tiles	Supply & Laying of Interlocking Pavers over 2-inch Aggregate/Mortar Base	SQFT	600	250	1,50,000
58	Charging Infra	Painting	Supply & Application of Parking/Foundation Floor Paint , 1 Coat Primer + 2	SQFT	600	140	84,000

13/2, K Gollahalli, Bangalore South, Bangalore 60
Civil / Mechanical / Electrical / Telecom / IT

Annexure C6: Vendor Quotation, The Lynx (page 6 of 6)



			Finish Coats, including Parking Stencil Marking				
59	Charging Infra	Granite	Supply & Laying of 19 mm Thick Granite	SQFT	150	550	82,500
			Total				32,04,798

Terms & Conditions

- **Installation & Commissioning Timeline:** 30-45 days from the date of receipt of advance payment and necessary site/document approvals.
- **Payment Terms:** 50% advance along with the work order and 50% **within 15 days from the date of completion of the work.**
- **Warranty:**
 - Transformer (TC): **12 months** from the date of commissioning.
 - Other electrical apparatus/equipment: **6 months** from the date of commissioning.
- **EB Liaisoning:** Necessary documents and information required from your side for EB/BESCOM liaisoning.
- **GST:** GST will be charged extra at **18%** as applicable.

Note: The quantities mentioned in the quotation/BOQ are approximate and may vary depending on the actual site conditions and site requirements. Any variation in quantities or additional works, if required, will be considered and charged accordingly with prior approval.

For M/s The Lynx

For THE LYNX

Authorized Signatory

13/2, K Gollahalli, Bangalore South, Bangalore 60
Civil / Mechanical / Electrical / Telecom / IT

Annexure D: Exicom Charger and Canopy Quotations

[Attach the Exicom quotation for the 120 kW and 30 kW chargers and the canopy quotation here]